

Self Contained Ice Machine up to 24,5 Kg



Routine Maintenance Alarm



Front ON-OFF Switch

Storage bin antibacterial pouch & holder



Spray bar quick disconnect



Proximity condenser air filter



Patented anti-Scale system




Easy bin access



Hygienic scoop holder



Available as optional KITLEGSEXT000

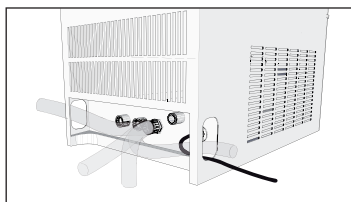

Features

- Produces individual Gourmet crystal clear supercubes
- Up to 24,5 kg daily ice cubes production
- Up to 9 kg (20 lbs) ice storage capacity
- Resistant stainless steel exterior
- Simple and reliable electromechanic controls
- Front panel in& out airflow (air-cooled model only) for built-in installation
- Front access condenser air filter, removable and washable (air cooled version only)
- Easily accessible front panel mount ON-OFF Switch
- Routine Maintenance visible alarm light on front panel
- Ergonomically designed ice storage access, with disappearing door.
- Door-closing movement dampening system
- Vapor-based microbial control system pouch in ice storage area
- Water system protected by patented anti-scale system
- Optional PWD System for remote water drain (easy-fit installation)
- AgION antimicrobial agent embedded in moulded plastics parts
- CFC-free R-134a Refrigerant
- 2 years manufacturer warranty

AC 46 Technologies



Model	Compressor	10°: 10°C			21°: 15°C			24h			Dimensions (mm)
		[kg]	[lbs]	N°*	[kg]	[lbs]	N°*	[kg]	[lbs]	N°*	
AC 46 AS		24,5	54	1225	22	48	1100	9	20	450	[WxDxH mm] 386x600x643
AC 46 WS		24,5	54	1225	22,5	49	1125	9	20	450	[WxDxH inches] 15 3/16" x 23 5/8" x 25 3/8"

[v/Hz/ph]
230/50/1

R 134a

*Estimate number of small, medium or large size gourmet cubes.
Standard legs 120 mm high included. **Optional: PWD System.**

This product qualifies for the following listings:



2 Years Warranty

Subject to certain limitations and exclusions

Medium Gourmet
20 g




34,5 mm x 30,5 mm x 29,5 mm
1 6/16" x 1 3/16" x 1 3/16"

Certified ISO 9001:2000

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.

Self Contained Ice Machine up to 24,5 Kg

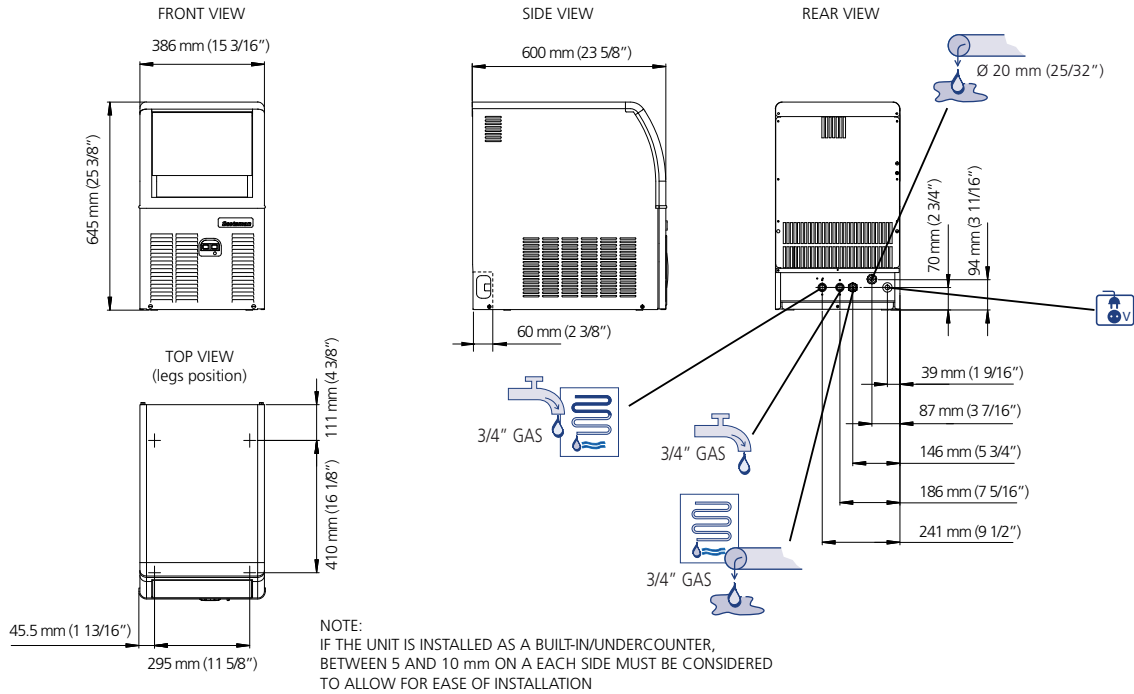

AC 46 AIR COOLED

°C \ °F	50° 10°	60° 15°	70° 21°	90° 32°	
10°	24.5	24	23.5	22.5	kg
50°	54	53	52	49	lbs
21°	22.5	22	21.5	20.5	kg
70°	49	48	47	45	lbs
32°	19.5	19	18.5	17.5	kg
90°	43	42	41	41	lbs
38°	18	17.5	17	16	kg
100	39	38	37	35	lbs



AC 46 WATER COOLED

°C \ °F	50° 10°	60° 15°	70° 21°	90° 32°	
10°	24.5	24	23.5	22.5	kg
50°	54	53	52	49	lbs
21°	23	22.5	22	21	kg
70°	50	49	48	45	lbs
32°	22	21.5	21	20	kg
90°	48	47	45	40	lbs
38°	20	19.5	19	18	kg
100	40	43	42	39	lbs



Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

Model	Compressor	Capacity [Btu/h]	Capacity [W]	Ice Size [Ømm ²]	Power [W]	FUSE	Energy [kWh] - 100 Kg	Water [l/h]	Water [gal/h]	Weight [kg] [lbs]	Weight [kg] [lbs]
AC 46 AS	🌀	2730	800	1,5	400	10	n.a.	3.2	0.84	35 77	42 93
AC 46 WS	💧	2730	800	1,5	400	10	n.a.	27.3	7.2	35 77	42 93

CONTACT POINTS:

Europe
Scotsman Europe-Frimont S.p.A.
Via Puccini, 22
20010 Pogliano (Milano) Italy
Ph: (+39) 02-93960208
Fax: (+39) 02-93960201
scotsman.europe@frimont.it

Asia and Pacific
Scotsman Ice Systems-Frimont S.p.A. (R.O.)
627A Aljunied Road-#04-04 Biztech Centre
Singapore 389842
Ph: (+65) 6738 5393
Fax: (+65) 6738 1959
scotsice@singnet.com.sg

China
Scotsman Ice Systems (Shanghai)
Room 2503, Building 2
20 Xuhong Middle Road, Xuhui District
Shanghai China 200235
Main line: (+86) 21 61313200
Fax: (+86) 21 61313330
scotsman.shanghai@scotsman-china.com

Middle East & N. Africa
Scotsman Ice Systems Dubai Office
P.o. Box 21648
Sharjah - U.A.E.
Ph: (+97) 16-5773-164
Fax: (+97) 16-5773-165
scotsman@eim.ae

South Africa
SCOTSMAN Ice Systems SA Pty. Ltd
No. 4, Lakowlow Business Park
8-10 Yaldwyn Road - Jet Park
P.O. Box 44 - Riverclub 2149
Ph: (+27) 11 789 8400 - 11 789 8914
Fax: (+27) 11 789 8411
scotsman@telkomsa.net

Spain
Scotsman España, S.L.U. c/ Galapagar, 12
Poligono Industrial Ventorro del Cano
28925 Alcorcon (Madrid)
Ph: (+34)91-1109796
Fax: (+34)91-6337423
scotsman@scotsman-espana.es
www.scotsman-espana.es